

Uncompromised Performance - Unequaled Versatility

The self-powered PowerNet ST and non-powered STX Series loudspeakers unite advanced technology and application-driven engineering to bring live sound closer to the ultimate reference point: reality. Patented CoEntrant M/H transducers, Class D Digital Amplification and unique innovations such as our Complex Conic horns combine to deliver natural sounding music and intelligible speech. Wherever audiences and operators demand superior performance and ease of use, ST/STX loudspeakers are the choice for transparent, reference quality performance.

All ST5LR PowerNet loudspeakers are RHAON empowered for flexible analog and digital signal distribution and loudspeaker management and control over a standard Ethernet network.

Applications

- Virtually any application where low frequency directional control and arrayability are critical issues and outstanding sonic performance is required.
- Distributed systems in sports arenas and stadiums, Multi-channel A/V playback systems, live sound and music systems in clubs and disco's (with associated ST/STX5M2 mid-high modules and ST/STX5, ST/STX6, ST/STX7, ST/STX8 and ST/STX9 full-range 3-way loud speakers).
- Array modules for theatrical and concert sound systems, sound reinforcement systems in houses of worship, performing art centers, etc..



PM-2LR PowerNet Digital Amplifier

Passive or self-powered and networked, you can choose the system configuration that meets your needs. Select the STX5L when the project dictates the use of external amplifiers and the self-powered PowerNet ST5LR for convenience and control in other applications.

The PM-2LR, the heart of the PowerNet ST5LR is a new kind of intelligent electronic system. It combines Class D digital amplification with RHAON, the Renkus-Heinz Audio Operations Network for comprehensive DSP controlled signal processing and control.

RHAON EMPOWERED RHAON empowers you with CobraNet digital audio distribution, user configurable DSP for maximum control, remote systems management from any Windows computer, life safety functions and more – all using standard Ethernet hardware and cable.

The PM-2LR has dual analog inputs, dual CobraNet inputs and an AES3 serial input. The onboard DSP is easily configured using RHAON software; it includes eight bands of parametric EQ, high and low shelving filters, delay and input level control. Critical operating parameters such as signal clipping, amplifier output voltage and current, and temperature are continually monitored with automatic alert functions.

ST / STX Series

STX5L

Non-Powered

ST5LR

Powered

Quad 12" Low Frequency Loudspeaker Module

PASSIVE : POWERED : NETWORKED



• Quad 12-Inch Low Frequency Loudspeaker Modules

Are a perfect match to the ST/STX5M2 mid-high module and to full-range, large format ST/STX series loudspeakers when additional low frequency energy is needed.

• Flexible Input Configurations

Choose an external amplifier or go self-powered with the PM1LR PowerNet Amplifier with RHAON for flexible analog and multi-channel digital signal distribution, computer control and supervision.

• ST5LR PowerNet Low Frequency Module

With PM-2LR PowerNet digital amplifier with RHAON.

• STX5L Non-Powered Low Frequency Module

Same high performance as the PowerNet ST5LR only non-powered. Rated at 4000 Watts program at 2 Ohms.

• Dipolar Low Frequency Design

Provides superior low frequency directional control in the vertical plane.

• High Power, High Performance 12-Inch Woofers

Deliver accurate 40 to 500 Hz response, 143 dB peak SPL performance.

• Trapezoidal Enclosures

Share the same footprint as their companion ST/STXM2 mid-high modules and the ST/STX5, ST/STX6, ST/STX7, ST/STX8 and ST/STX9 full range loudspeakers.

TECHNICAL INFORMATION

Sensitivity
ST5LR: 1.4 V for rated power output
STX5L (1W/1m): 104 dB

Max SPL
ST5LR: 139 dB peak
STX5L: 143 dB peak

Freq. Response: 40 Hz to 500 Hz

LF Drivers: Four 12" model SSL 12-13 woofers; 4" VC each 500 W RMS (2000 W RMS total)

Crossover Points: 500 Hz

Enclosure: Multi-ply hardwood, perforated metal grille

Power: STX5L: 2000 Watts RMS at 4 Ohms

Connectors: STX5L: Neutrik 4-pin connectors or screw terminals

Finish: Black, white or custom paint, TuffTex, Natural (unfinished), Weather resistant

Hardware Options: 12-point universal mtg hardware, Handles, AeroQuip fly-track, R-Hang hardware

Dimensions: 32" H x 24" W x 32 1/2" D
 (81.3 cm x 61 cm x 81.9 cm)

Weight
ST5LR: 200 Lbs. (90.7 Kg) net
STX5L: 170 Lbs (77.1 Kg) net

PM-2LR AMPLIFIER

PWR Rating (Watts): 2 x 850 RMS

Freq. Response: +0.0, -5 dB, 20 Hz to 20 kHz

THD Distortion: < 0.01 % typical
CMR: > 90 dB, 30 Hz to 2 kHz

Hum & Noise: <100 dB, 20 Hz to 20 kHz)
Input Sensitivity: 1.4 V for RPO

Damping Factor: 135 (100 Hz to 400 Hz)
 100 (400 Hz and above)

Power:
Connector PowerCon locking connector

Requirements: 90/136 V AC or 180/260 VAC, 50/60 Hz
 13 Amps @ 120 V, 6.5 Amps @ 240 V
Idle Current: 380 mA @ 120 V, 190 mA @ 240 V

Max Inrush Current (Soft Start): 14.5 Amps @ 120 V, 7.3 A @ 240 V

Inputs

Analog: Dual inputs; looping XLR (female in & Male out) & Looping Phoenix connectors

CobraNet: Dual RJ 45 connectors (for redundancy)

AES3 Format: AES3 Format Serial Audio (AES/EBU input); Phoenix connector

Controls: LF, MF, HF Mute buttons
 Up & Down Output Level push buttons
 10 dB Input pad (on Analog 1 input)
 Power On/Off, Push-To-Reset circuit breaker

Computer Controls: Gain, Mute, On/Standby, Input Selection; Compression, 9-Band Parametric EQ, Shelving & Rolloff Filters, Delay


Status Indicators: Power, Signal, Overdrive, Thermal, Mute, Input Pad

Protection: Soft & Peak Limiting, Excursion Control & Thermal Regulation

Digital Format: 16, 20 or 24 bit PCM; 48 or 96 kHz sample rate; selectable Network Latency.

Note: All analog inputs and outputs comply with AES Standard 48-2005 on interconnecting, grounding and shielding.

DIMENSIONAL INFORMATION

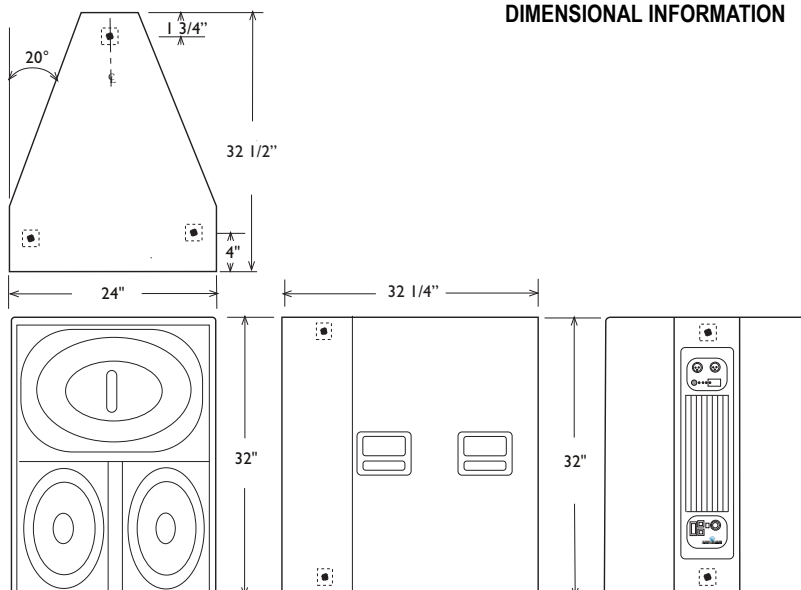

Note:

The UMH (Universal Mounting Hardware) attachment points have Metric M10 threads and are positioned 1 3/4" from the edges unless otherwise indicated.

Portable models are normally supplied with handles and no attachment points.

The rear view of a STX5L is shown. The enclosure is shown without its metal grille.

For more detailed dimensional information, please refer to the 2D and 3D drawing files on our website, www.renkus-heinz.com.