

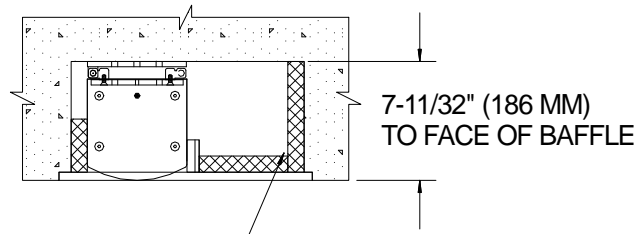


SEE NOTE 1

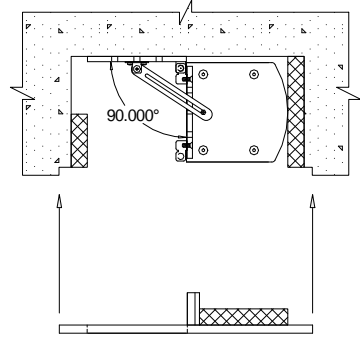


ABSORPTIVE MATERIAL


HORIZONTAL SECTION

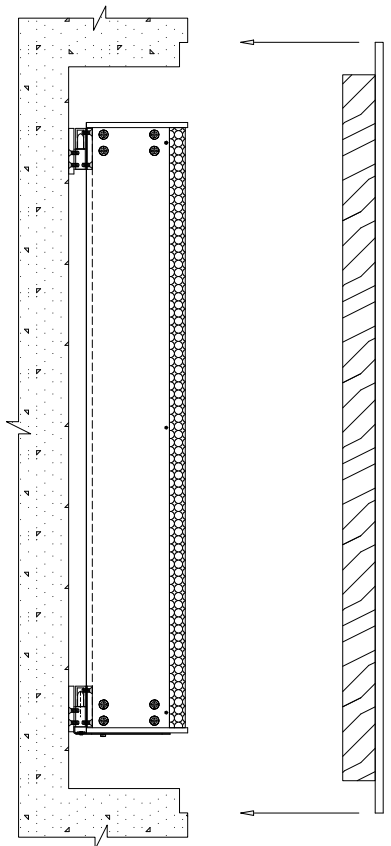

VERTICAL SECTION

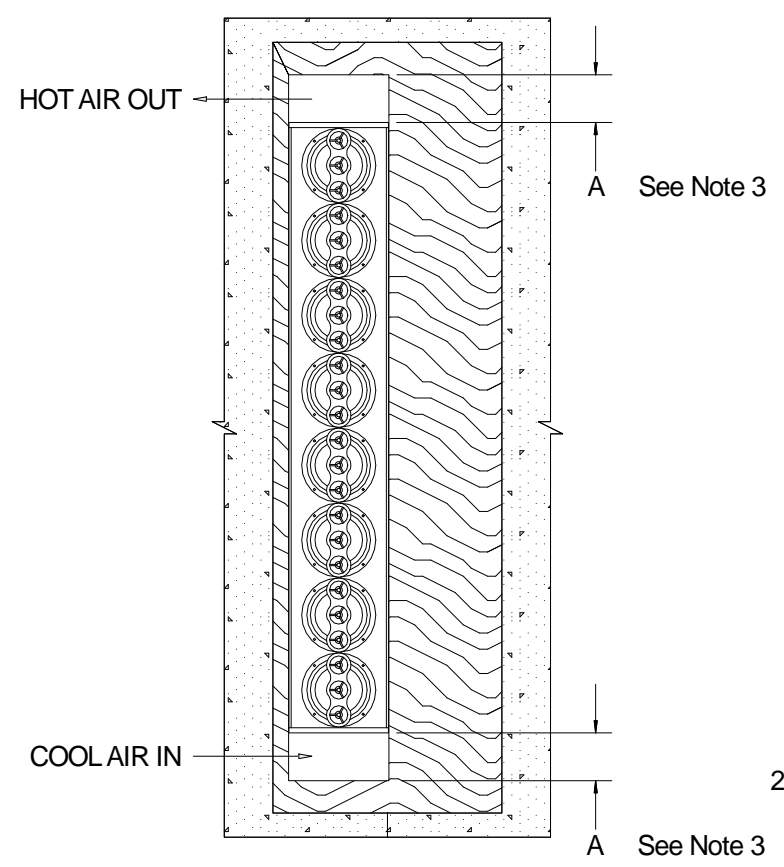

FRONT VIEW W/BAFFLE  
NO GRILL

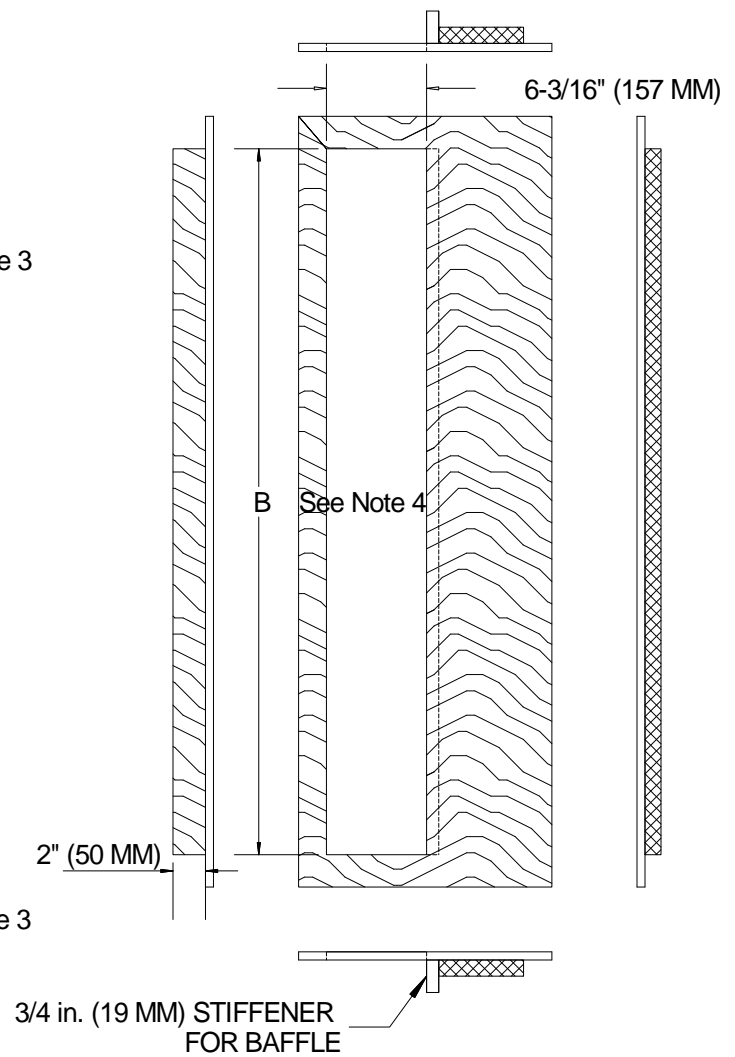

BAFFLE DIMENSIONS

- NOTES:
- 1) MINIMUM CAVITY WIDTH FOR ADEQUATE COOLING = 9 in. (230 MM).
  - 2) LOUDSPEAKER WILL HAVE TO BE LIFTED FROM CAVITY FOR SERVICE IF CAVITY IS LESS THAN 14-3/8 in. (365 MM)
  - 3) DIMENSION "A"  
MINIMUM 3 in. (75 MM) IC8 & IC16, 4 in. (100 MM) IC24 & 32
  - 4) DIMENSION "B" MINIMUM:  
IC8 = 43-9/16 in. (1110 MM)  
IC16 = 80-9/16 in. (2050 MM)  
IC24 = 119-11/16 in. (3040 MM)  
IC32 = 156-11/16 in. (3980 MM)
  - 5) ABSORPTIVE MATERIAL = Owens Corning Fiberglas Duct Liner Board, 1 in. (25 mm) thick or equal.

THE MATERIAL CONTAINED HEREIN IS PROPRIETARY TO RENKUS-HEINZ AND SHALL NOT BE REPRODUCED DISCLOSED OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN APPROVAL OF RENKUS-HEINZ.

PART NUMBER LIST			
REV	DESCRIPTION	DATE	BY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS .01 .XXX±.005	INTL JM	DATE 10-2011	 <b>RENKUS-HEINZ, inc.</b>
DRAWN CHECK DESIGN ENG APPROV APPROV REF DWG	TITLE: <b>FLUSH MOUNTING ICR-II</b>	SIZE <b>B</b>	
NEXT ASSY.	USED ON	DO NOT SCALE DRAWING	CODE IDENT DWG NO. SCALE NONE WEIGHT SHEET 1 OF 1