


- NOTES**
- 1) M10x1.5 bolts supplied with UMH.
 - 2) Customer may substitute M10x1.5 forged, load rated eyebolts (included with UMH) for bolts to provide attachment point for "tilt" adjustment.
 - 3) Use thread locking compound on all fasteners.

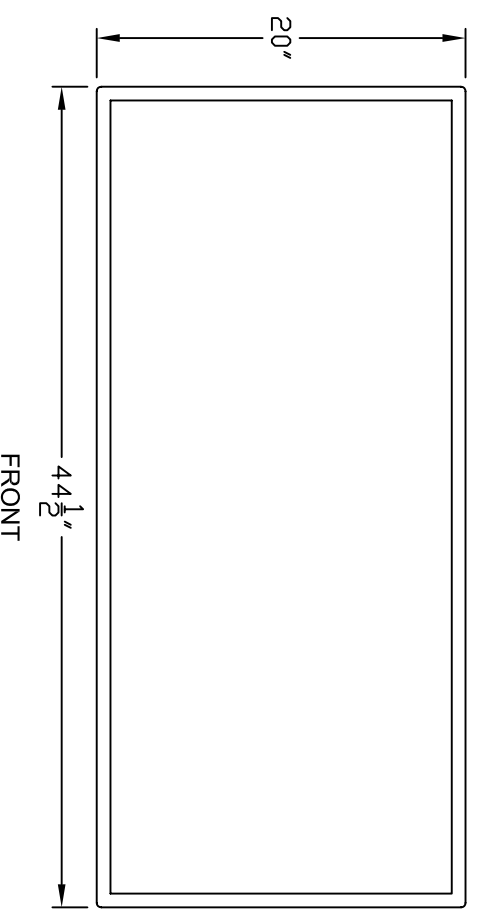

WARNING! Hanging loudspeakers is a serious undertaking that should be done only by qualified and experienced personnel. Check with an Architect or Structural Engineer to verify any building attachment points. Renkus-Heinz is not responsible for any non-Renkus-Heinz products or for any misuse of Renkus-Heinz products.

REV	DESCRIPTION	DATE	BY

UNLESS OTHERWISE SPECIFIED	INTL.	DATE
DIMENSIONS ARE IN INCHES	DRAWN	
TOLERANCES ARE:	CHECK	
DECIMALS	DESIGN	
XXX .01	ENG	
XXXX.005	APPROV	
	APPROV	
	REF DWG	
	DO NOT SCALE DRAWING	
	BEARER AND REMOVE SHARP EDGES	

THE MATERIAL CONTAINED HEREIN IS PROPRIETARY TO RENKUS-HEINZ AND SHALL NOT BE REPRODUCED OR DISCLOSED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN APPROVAL OF RENKUS-HEINZ	SIZE	CODE	IDENT	DWG NO.	REV
	D			EEE-IC215S-FR	A
	SCALE 1 = 1	WEIGHT		EEE-IC215S-FR	A
					SHEET 1 OF 1

RENNKUS-HEINZ, Inc.

EEE-IC215S-FR ASSEMBLY

PART NUMBER LIST